

| | | | | | |
|------|------|--------|----|---------|-------|
| B | | 3142 | SH | 4/9/93 | |
| A | | 1601 | AB | 8/21/90 | DB |
| REV. | ZONE | E.C.N. | BY | DATE | APPR. |

DRAWN
AWB
DATE
7/24/90
CHECKED
APPROVED

medeco[®]
HIGH SECURITY LOCKS
A HILLENBRAND INDUSTRY
SALEM, VA.

DOOR & FRAME PREP
FOR WOODEN DOOR
STANDARD DEADBOLT

PART NO.
PK-120172

SCALE: FULL SHT. 1 OF 1

COMPUTER FILENAME:
pk-120172-b-bl.prt

DO NOT SCALE DWG.
REMOVE ALL BURRS

TOLERANCES
UNLESS SPECIFIED

FRACTIONS ±.015
2 PLACE DEC. ±.010
3 PLACE DEC. ±.005
CONCENTRICITY ±.004 I.R.
ANGLES 0° 30'


ABOVE DIMS. APPLY
BEFORE PLATING. IF
PLATED SEE PLAT-
ING SPEC. SHEET.

MATERIAL:



FINISH:

ALL DIMENSIONS GIVEN
ABOUT CENTERLINES
MUST BE CENTRAL WITH-
IN TOLERANCE UNLESS
OTHERWISE SPECIFIED.

THIRD ANGLE
PROJECTION SHOWN



THIS DOCUMENT IS THE PROPERTY OF MEDECO SECURITY LOCKS, INC.
ITS USE IS CONDITIONED UPON THE USER'S AGREEMENT NOT TO COPY
OR REPRODUCE THIS DOCUMENT, IN WHOLE OR IN PART, OR TO USE THE
DOCUMENT TO REPRODUCE THE MATERIAL DESCRIBED THEREIN, OR FOR
ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF MEDECO
SECURITY LOCKS.

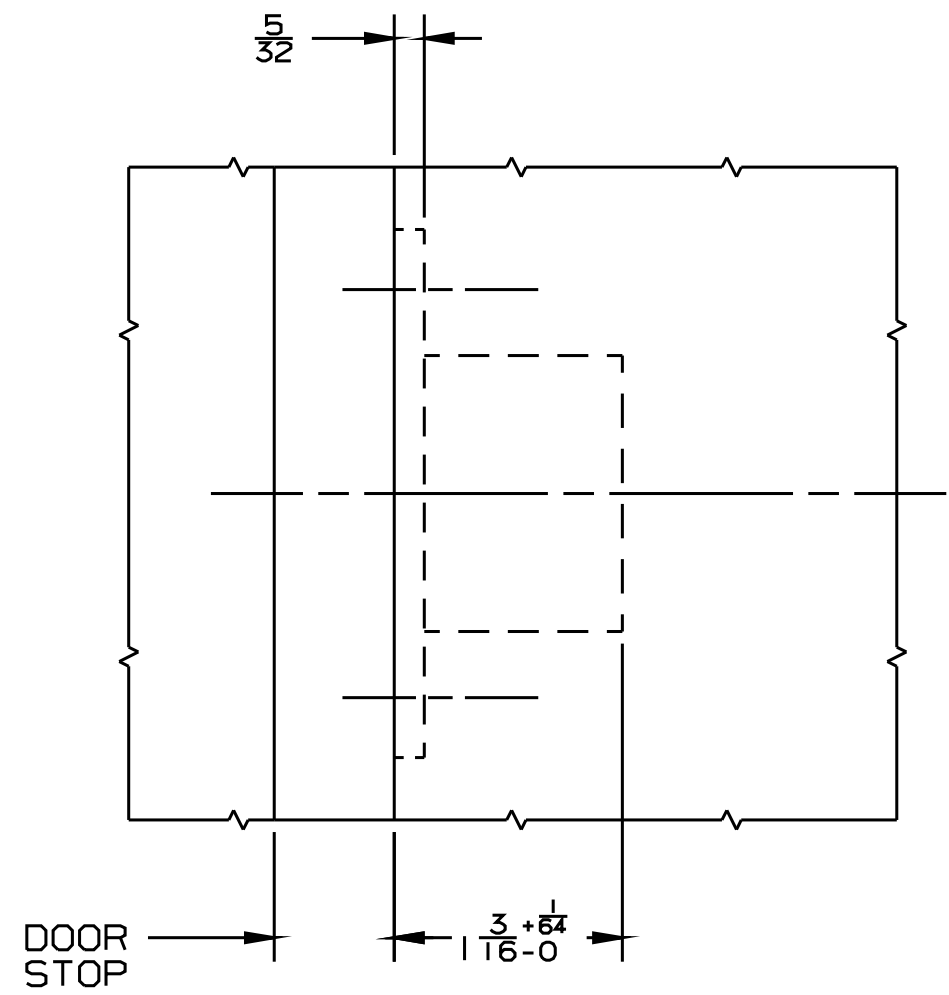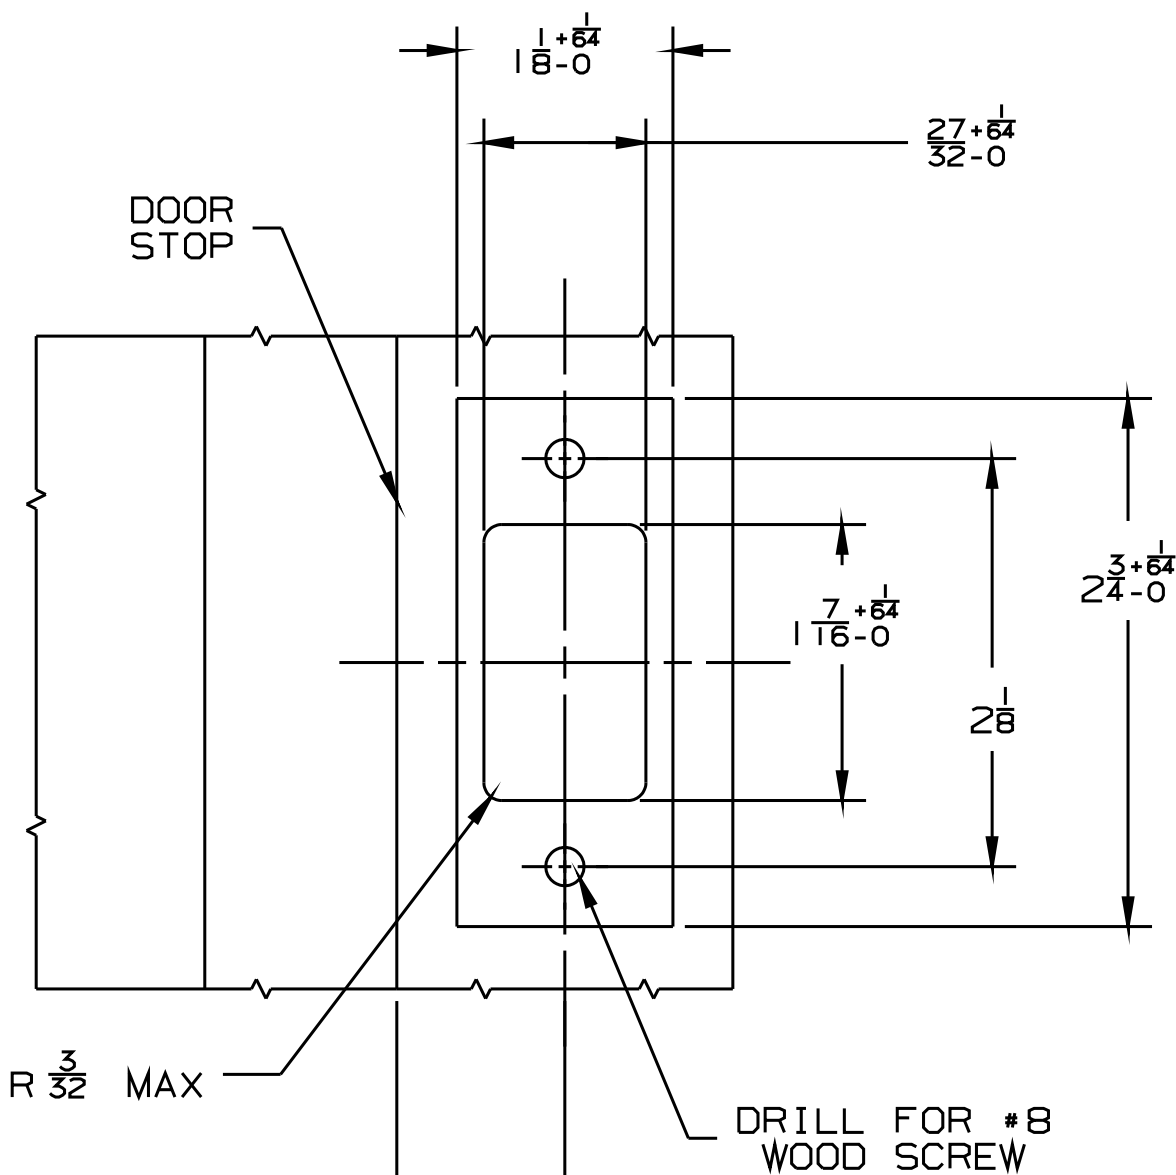

HALF DOOR THICKNESS
(MEASURED FROM DOOR
STOP OR SILENCER
WHEN USED)

DRILL FOR #8
WOOD SCREW

| | | | | | |
|------|------|--------|----|---------|-------|
| B | | 3142 | SH | 4/9/93 | |
| A | | 1601 | AB | 8/21/90 | DB |
| REV. | ZONE | E.C.N. | BY | DATE | APPR. |

DRAWN
AWB
DATE
7/24/90
CHECKED
APPROVED

medeco[®]
HIGH SECURITY LOCKS
A HILLENBRAND INDUSTRY
SALEM, VA.

FRAME PREPARATION
FOR WOODEN DOOR
DEADBOLT STRIKE

PART NO.
PK-120173

SCALE: FULL SHT. 1 OF 1

COMPUTER FILENAME:
pk-120173-b-bl.prt

DO NOT SCALE DWG.
REMOVE ALL BURRS
TOLERANCES
UNLESS SPECIFIED
FRACTIONS ±.015
2 PLACE DEC. ±.010
3 PLACE DEC. ±.005
CONCENTRICITY ±.004 I.R.
ANGLES 0° 30'


ABOVE DIMS. APPLY
BEFORE PLATING. IF
PLATED SEE PLAT-
ING SPEC. SHEET.

MATERIAL:




FINISH:

ALL DIMENSIONS GIVEN
ABOUT CENTERLINES
MUST BE CENTRAL WITH-
IN TOLERANCE UNLESS
OTHERWISE SPECIFIED.

THIRD ANGLE
PROJECTION SHOWN




THIS DOCUMENT IS THE PROPERTY OF MEDECO SECURITY LOCKS, INC.
ITS USE IS CONDITIONED UPON THE USER'S AGREEMENT NOT TO COPY
OR REPRODUCE THIS DOCUMENT, IN WHOLE OR IN PART, OR TO USE THE
DOCUMENT TO REPRODUCE THE MATERIAL DESCRIBED THEREIN, OR FOR
ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF MEDECO
SECURITY LOCKS.

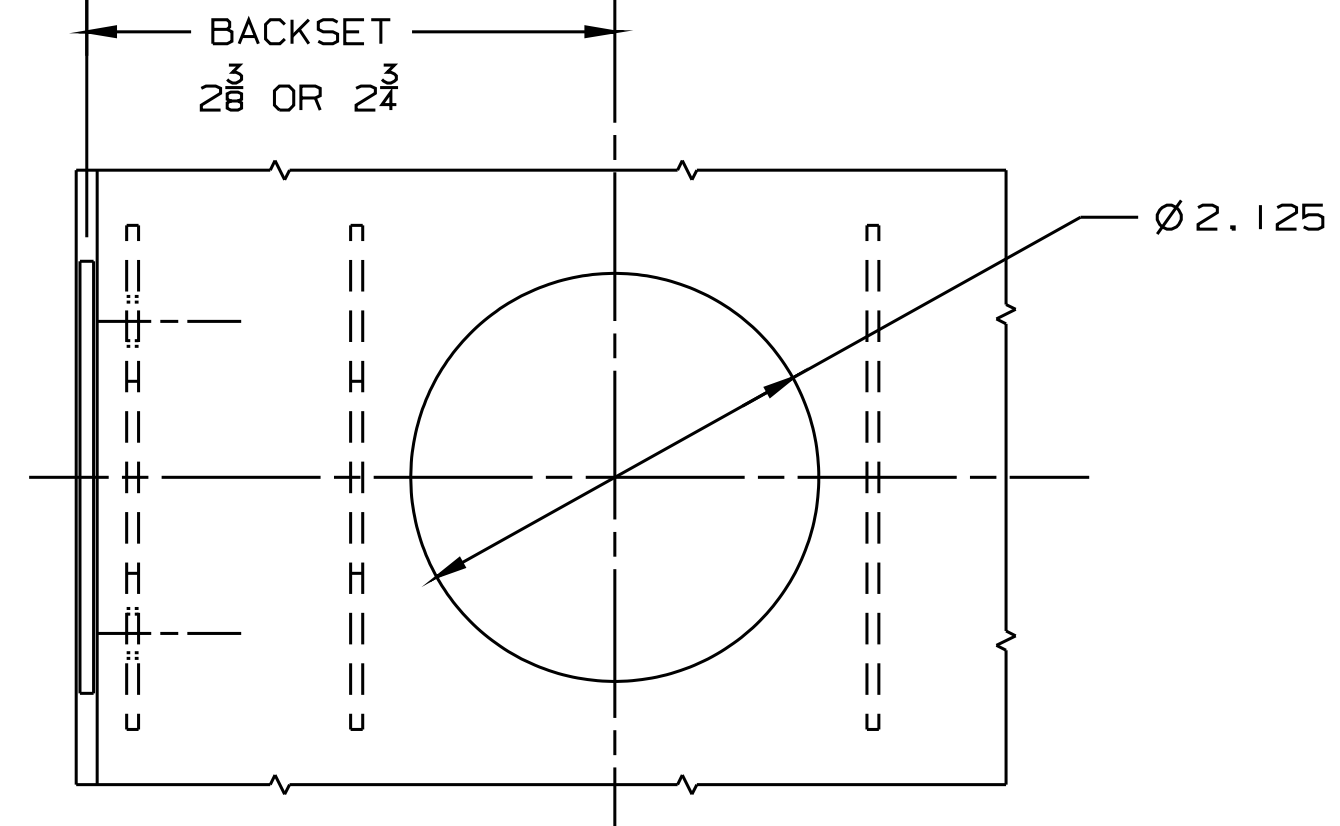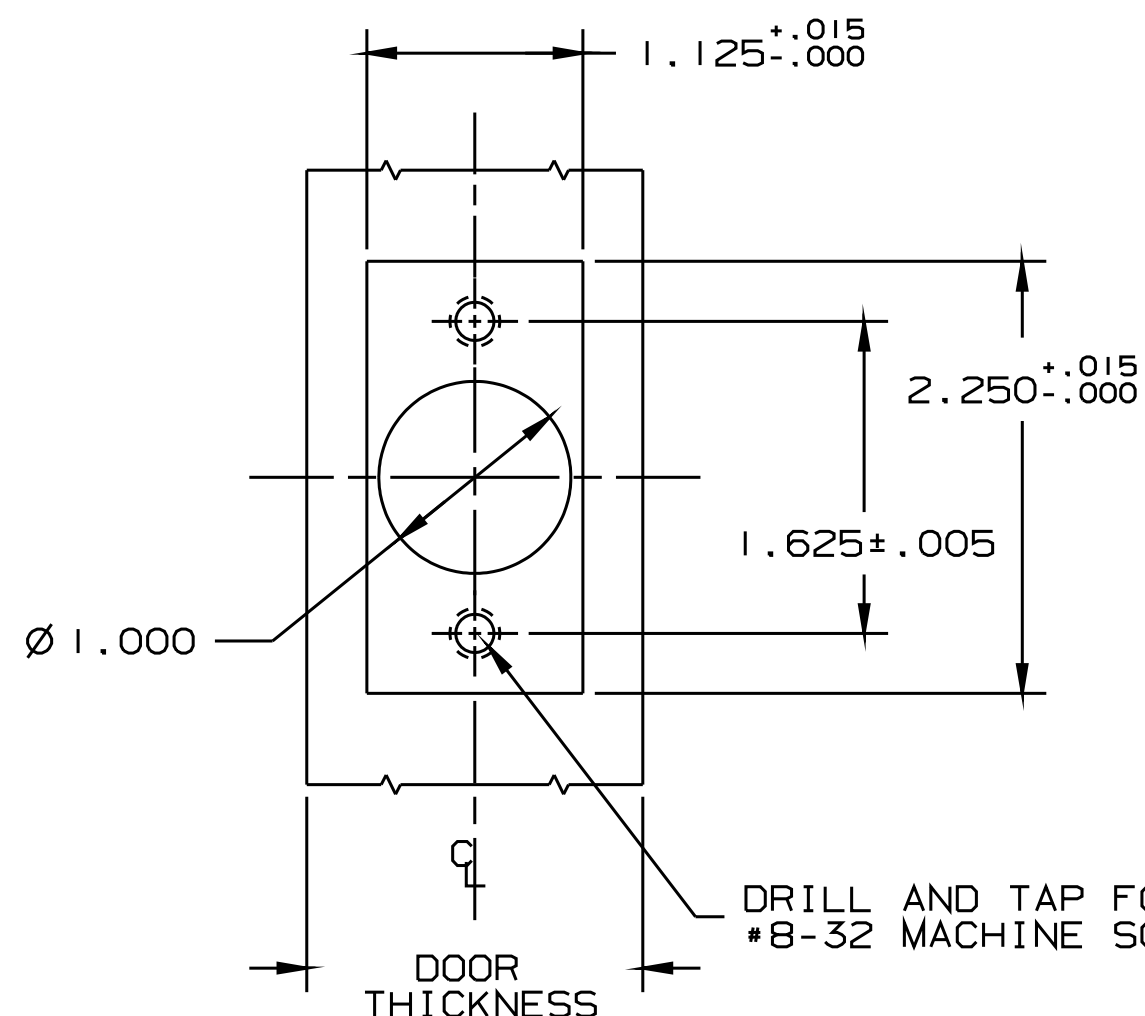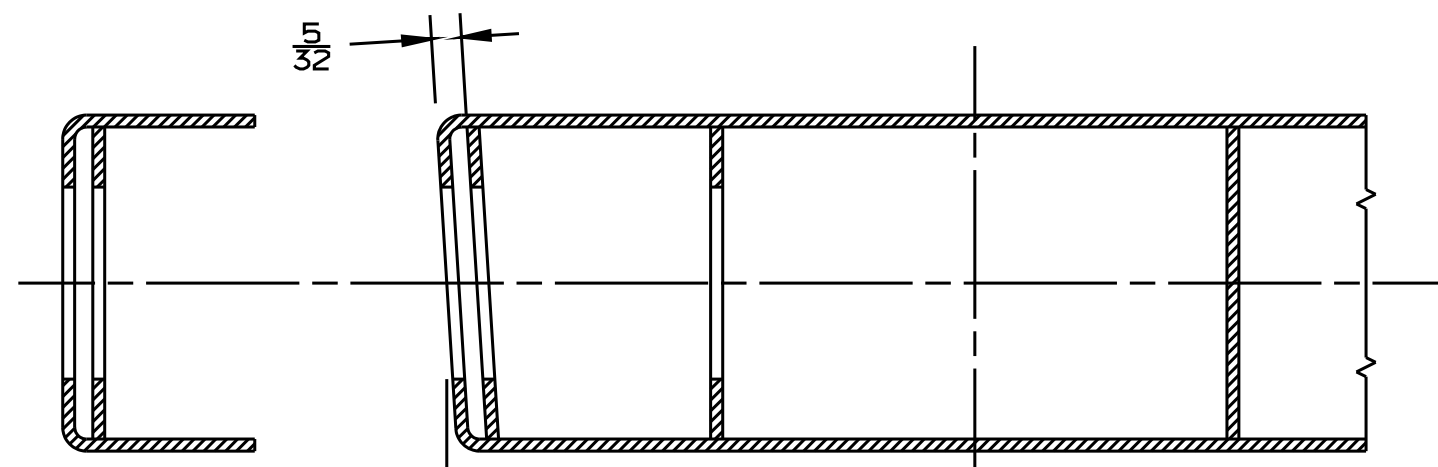

DRILL AND TAP FOR
#8-32 MACHINE SCREW

| | | | | | |
|----------|------|---|----|-------------|-------|
| A | | 1601 | AB | 8/22/90 | |
| REV. | ZONE | E.C.N. | BY | DATE | APPR. |
| DRAWN | | HIGH SECURITY LOCKS A HILLENBRAND INDUSTRY SALEM, VA. | | | |
| AWB | | | | | |
| DATE | | | | | |
| CHECKED | | DOOR & FRAME PREP FOR METAL DOOR STANDARD DEADBOLT | | | |
| APPROVED | | PART NO. | | | |
| | | PK-120174 | | | |
| | | SCALE: FULL | | SHT. 1 OF 1 | |

ALL DIMENSIONS GIVEN ABOUT CENTERLINES MUST BE CENTRAL WITHIN TOLERANCE UNLESS OTHERWISE SPECIFIED.



COMPUTER FILENAME:
pk-120174-a-bl.prt


DO NOT SCALE DWG.
REMOVE ALL BURRS

TOLERANCES UNLESS SPECIFIED

FRACTIONS ±.015
2 PLACE DEC. ±.010
3 PLACE DEC. ±.005
CONCENTRICITY ±.004 I.R.
ANGLES 0° 30'

ABOVE DIMS. APPLY BEFORE PLATING. IF PLATED SEE PLATING SPEC. SHEET.


MATERIAL:
FINISH:

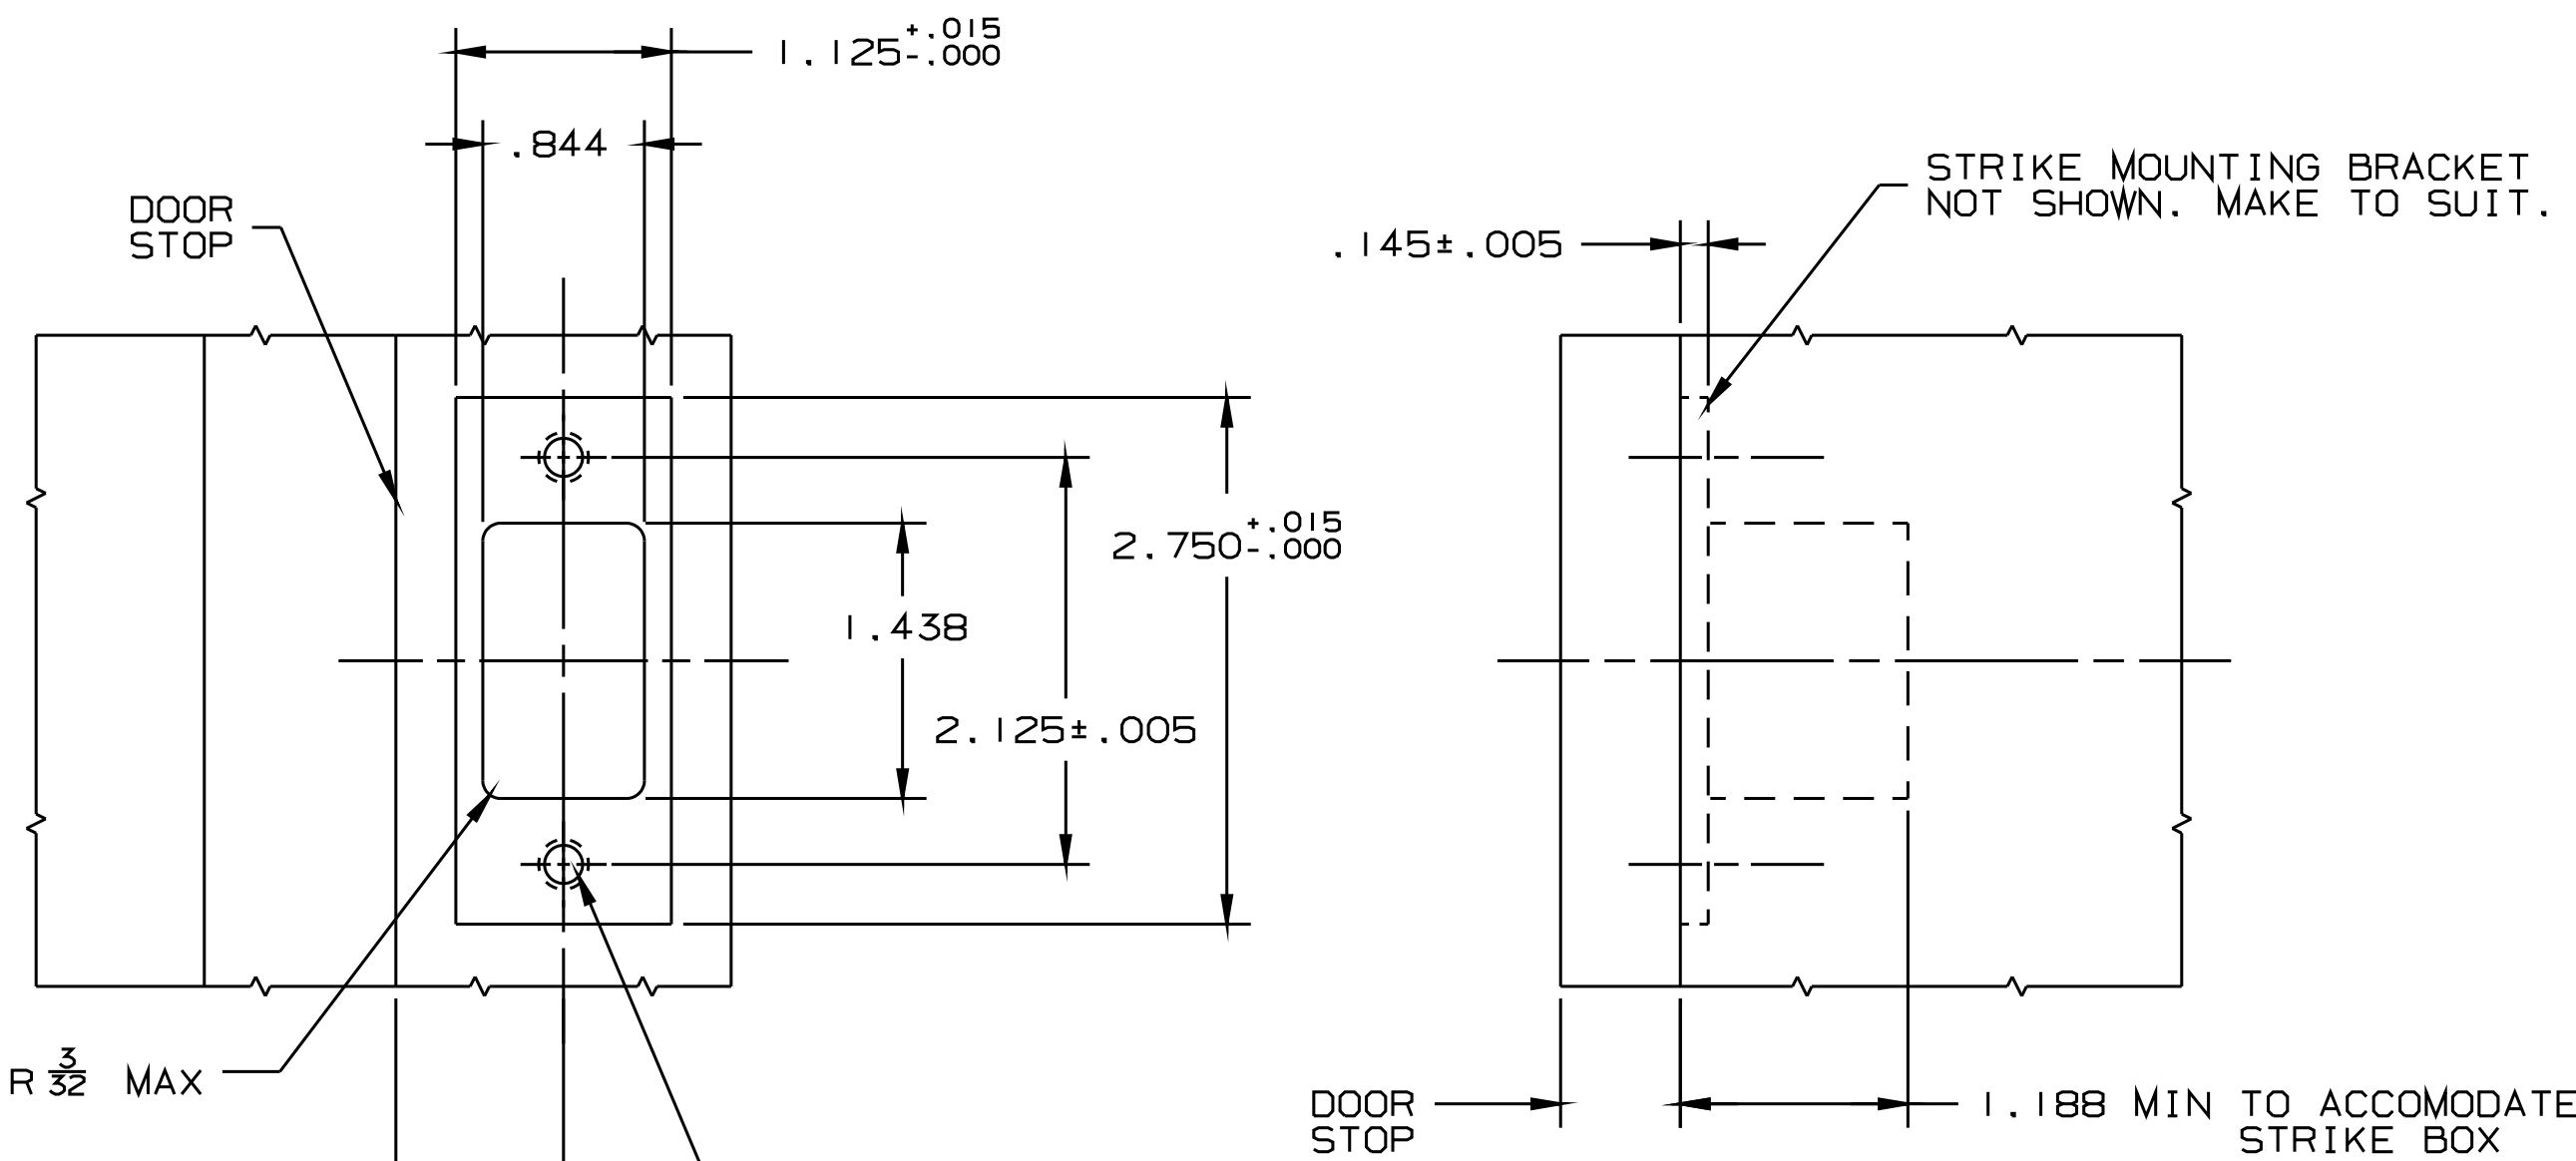

HALF DOOR THICKNESS
(MEASURED FROM DOOR
STOP OR SILENCER
WHEN USED)

DRILL AND TAP FOR
#8-32 MACHINE SCREW

ALL DIMENSIONS GIVEN
ABOUT CENTERLINES
MUST BE CENTRAL WITH-
IN TOLERANCE UNLESS
OTHERWISE SPECIFIED.



THIS DOCUMENT IS THE PROPERTY OF MEDECO SECURITY LOCKS, INC.
ITS USE IS CONDITIONED UPON THE USER'S AGREEMENT NOT TO COPY
OR REPRODUCE THIS DOCUMENT, IN WHOLE OR IN PART, OR TO USE THE
DOCUMENT TO REPRODUCE THE MATERIAL DESCRIBED THEREIN, OR FOR
ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF MEDECO
SECURITY LOCKS.

COMPUTER FILENAME:
pk-120175-a-bl.prt

DO NOT SCALE DWG.
REMOVE ALL BURRS

TOLERANCES
UNLESS SPECIFIED

FRACTIONS ±.015
2 PLACE DEC. ±.010
3 PLACE DEC. ±.005
CONCENTRICITY ±.004 I.R.
ANGLES 0° 30'

ABOVE DIMS. APPLY
BEFORE PLATING. IF
PLATED SEE PLAT-
ING SPEC. SHEET.

MATERIAL:
FINISH:

| | | | | | |
|-------------|---------|---|----|---------|-------|
| A | | 1601 | AB | 8/22/90 | |
| REV. | ZONE | E.C.N. | BY | DATE | APPR. |
| DRAWN | | HIGH SECURITY LOCKS A HILLENBRAND INDUSTRY SALEM, VA. | | | |
| AWB | | | | | |
| DATE | 8/22/90 | | | | |
| CHECKED | | FRAME PREPARATION FOR METAL DOOR DEADBOLT STRIKE | | | |
| APPROVED | | | | | |
| PART NO. | | PK-120175 | | | |
| SCALE: FULL | | SHT. 1 OF 1 | | | |